


DISMANTLING GAS LIFT WITH FIST

For all BQE stools and chairs.

Necessary instruments: a fist (and an old towel/cloth)

A: Dismantling gas lift – seat:

1. Place the chair upside down.
2. Place the gas lift in the highest position.
3. Lift the chair by the base so that the weight of the chair will help you to “free” the cylinder.
4. Place a towel or any other soft material over the frame and hit the frame a couple of times with a heavy hammer (a fist) till the upper part comes loose from the gas lift.

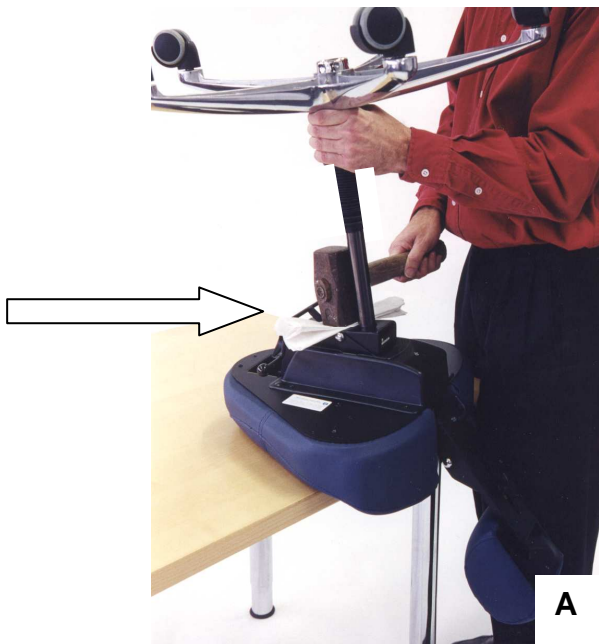

B: Dismantling gas lift - base:

1. Keep the base upside down.
2. Hit the edge of the gas cylinder with the hammer. It will come loose. Take care that it doesn't hit the ground.